

REOMX



code 1E600199

DESCRIPTION

- 7" color TFT Touch Screen color Display 800x480 pixel for a powerful intuitive graphics interface
- 2 Rear-lit 72-digit (2 lines of 36) LCD screen for the display of fader configuration
- 12 keys for direct access to playback and programming functions
- 12 faders with individual keys playback freely programmable as master/group master/manual cue
- 24 keys for direct access to playback registers
- 4 encoder wheels for controlling attributes during programming and control of effects during playback
- Jog Ball for PAN and TILT control with "locks" and "fine" buttons
- Grand Master fader + DBO key
- New round keys fine control
- Internal SD memory

POWER

- Powerful GUI for easy programming and control of a maximum of 576 Cue lists, each with a maximum of 999 Cues
- 3072 DMX channels. 4 DMX Out lines 1 DMX In line (independent) 2 universe on xlr 5 and 3 pin (up to 6 universe 3072 channel on artnet)
- Playback of a maximum of 24 cue-lists simultaneously
- Advanced shape engine
- Updateable personality library
- 6 families of Palettes for rapid control of the automated fixtures's functions. Palette Chris/Gam/Lee Rosco preprogrammed available on all kind of projector either RGB and CMY
- Cues: max 999 for each playback register
- Maximum number of cues storable per show: 9999
- 2 flexible LED lights
- Universal 82-265 Volt onboard switching power supply

OUTPUT



- 3072 channels freely configurable
- DMX channels for any number of dimmer channels and/or automated fixtures

CONNECTION

- 2 xlr connector 5 pin: DMX out
- 2 xlr connector 3 pini: Dmx out
- 1 rj45 connector: artnet
- 1 xlr connector 5 pin: DMX in
- 1 xlr 3 connector pin: SMPTE in
- 3 din connector: Midi In/Out/Thru
- 1 USB connector: for backup on external usb mass storage
- 2 USB connector for light
- 2 extension connector

NET WEIGHT

- 11 Kg

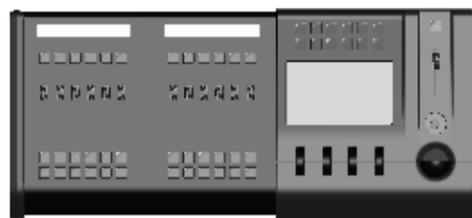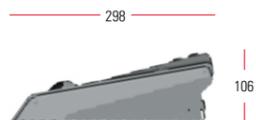

REOMX E





code 1E600299

FEATURES

- Rear-lit 72-digit (2lines of 36) LCD screen for the display of playback configuration
- 12 completely configurable scene control faders
- 36 keys for direct access to Playbacks
- Power supply directly from main board

NET WEIGHT

- 4 Kg

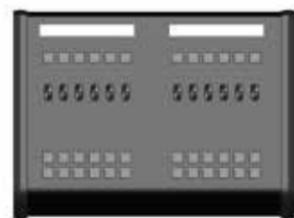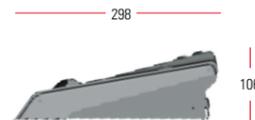

ONE OF THE 10 POSSIBLE CONFIGURATION

